



119-A Hwy 183
Piedmont, SC 29673
Tech Support(864) 907-6004 (call or text)
Email: Tech@DDMWorks.com

ECM Removal


BEFORE YOU BEGIN:

1. Your vehicle WILL NOT RUN without the ECM. Make sure your vehicle is parked in a safe and secure location while your ECM is out for it's tune flash.
2. It's always a good idea to disconnect the negative terminal from the battery before you begin work on your vehicle.
3. Make sure that the car engine is cool to the touch and you are in a well ventilated area away from open flames.

TOOLS NEEDED

10 mm socket wrench

1. Unlock the 3 RED clips by pulling them towards you.

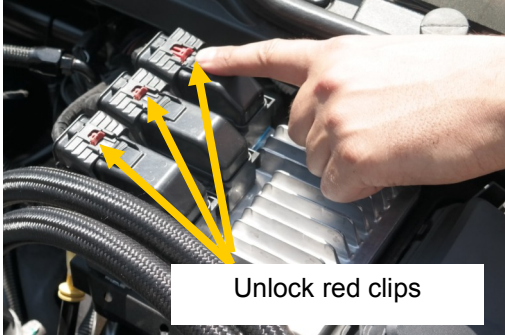

2. Press down on each spring lock, they will "click" when unlocked.






ECM Removal, continued

3. Raise each locking lever, then pull the connector straight up to fully disengage.



Raise all 3 locking levers to partially disengage

4. With a 10mm socket wrench, remove the two bolts securing ECM to vehicle.

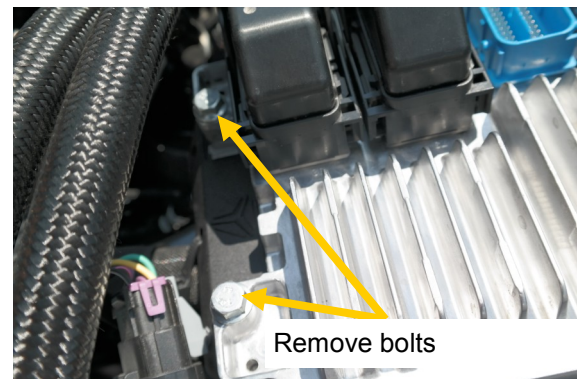

Congratulations! You have successfully removed your ECM!



119-A Hwy 183
Piedmont, SC 29673

Tech Support
(864) 907-6004 (call or text)
Email: Tech@DDMWorks.com